



UL Verification Services Inc.
7036 Snowdrift Road
Allentown, PA 18106
610-774-1300



Photometric Test Report

Relevant Standards
IES LM-79-2008, ANSI C82.77-10-2014, UL 1598-2008
CIE 13.3-1995, CIE 15-2004, ANSI C78.377-2017
IES TM-30-2018

Prepared For
Shenzhen Jing Xin Long Optoelectronics Technology Co LTD
401, Building B, Shan Yue Hua Science Park
No. 63 Xintang village, Longhua District
Shenzhen, 518110
China

Catalog Number
JXL-TZ06-T12W-UDH-3000K
Order Number
13362090
Test Number
13362090.01

Test Date

2020-06-16 - 2020-06-30

Prepared By

Josh Mitchell, Technician

Approved By

Shivani Vyas, Project Coordinator

The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Underwriters Laboratories.
This report must not be used by the client to claim product certification, approval, or endorsement by
NVLAP, NIST, or any agency of the Federal Government.



Table of Contents

| | |
|---|---------|
| Summary of Results | Page 3 |
| Integrating Sphere Results | Page 4 |
| Distribution Results | |
| Conditions / Summary of Results / Polar Plot / Zonal Lumens | Page 5 |
| Candela Tabulation / Average Luminance | Page 6 |
| Coefficients of Utilization / Cone of Light | Page 7 |
| ISOFootcandle Plot | Page 8 |
| In-Situ Results | Page 9 |
| Color Spatial Uniformity Results | Page 10 |

Laboratory results may not be representative of field performance
Ballast factors have not been applied

Testing was performed in a 2-meter integrating sphere using the 4π geometry method.

Absorption correction was employed for Sphere measurement



Luminaire Description: formed white aluminum housing, frosted lens enclosure
Lamp: 39 White LED array
Mounting: Surface – Ceiling
Ballast/Driver: One unmarked driver

Luminaire



Luminaire Characteristics
Luminous Diameter: 5.00 in.

Summary of Results

Integrating Sphere

Luminous Flux: 968.6 Lumens
Efficacy: 81.24 lm/w
CCT: 2988 K
CRI (Ra): 81.6

Distribution

Total Luminaire Output: 975.6 Lumens
Luminaire Efficacy: 81.9 lm/w
Maximum Candela: 353 Candela

Electrical Data at 120 VAC

Test Temperature: 24.6 °C
Voltage: 120.1 VAC
Current: 0.1009 A
Power: 11.92 W
Power Factor: 0.984
Frequency: 60 Hz
Current THD: 17.3 %

In-Situ

LED Temperature: 61.8 °C
Driver Temperature: 61.7 °C
Measured LED Current: 0.08500 A

Temperature is offset to an ambient temperature of 25°C as described in UL1598-2008.

Color Spatial Uniformity

Maximum $\Delta u'v'$: 0.0004





Color Quality - Integrating Sphere

Integrating Sphere Test Conditions

| Temperature | Voltage | Current | Power | Power Factor | Frequency | Current THD |
|-------------|-----------|----------|---------|--------------|-----------|-------------|
| 24.6 °C | 120.1 VAC | 0.1009 A | 11.92 W | 0.984 | 60 Hz | 17.3 % |


Summary of Results

| | | | |
|-----------------------------|------------|---------------------------|---------|
| Total Output: | 969 Lumens | Chromaticity (x): | 0.4311 |
| Efficacy: | 81.2 lm/w | Chromaticity (y): | 0.3909 |
| CCT: | 2988 K | Chromaticity (u'): | 0.2525 |
| CRI (Ra): | 81.6 | Chromaticity (v'): | 0.5152 |
| CRI (R9): | 4.1 | TM-30 Rf: | 84 |
| Peak Wavelength: | 603 nm | TM-30 Rg: | 96 |
| Dominant Wavelength: | 585 nm | TM-30 Rcs,h1: | -12% |
| S/P Ratio: | 1.37 | Duv: | -0.0045 |

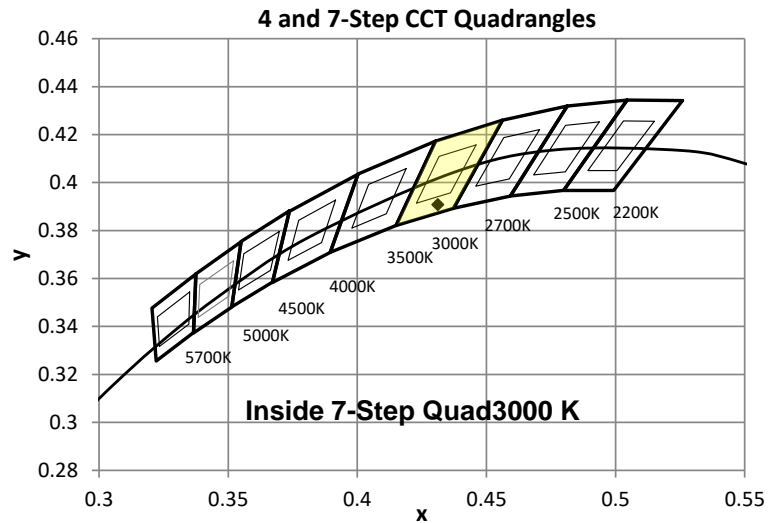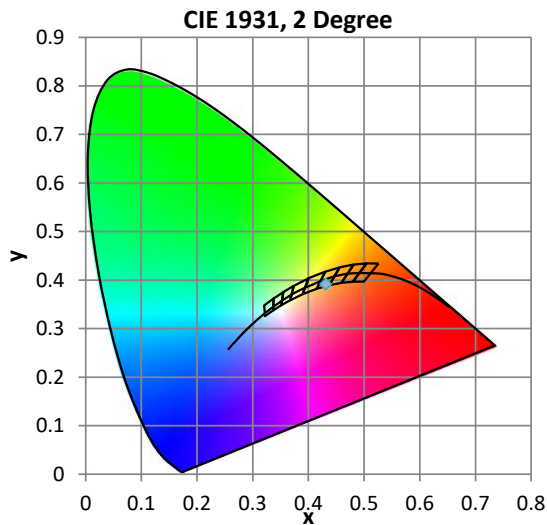

Color Rendering Index Detail

| Ra (CRI) | R1 | R2 | R3 | R4 | R5 | R6 | R7 | R8 | R9 | R10 | R11 | R12 | R13 | R14 | R15 |
|----------|------|------|------|------|------|------|------|------|-----|------|------|------|------|------|------|
| 81.6 | 81.0 | 92.9 | 93.0 | 78.2 | 81.7 | 91.1 | 79.3 | 55.8 | 4.1 | 83.8 | 77.3 | 75.8 | 84.2 | 97.0 | 74.1 |

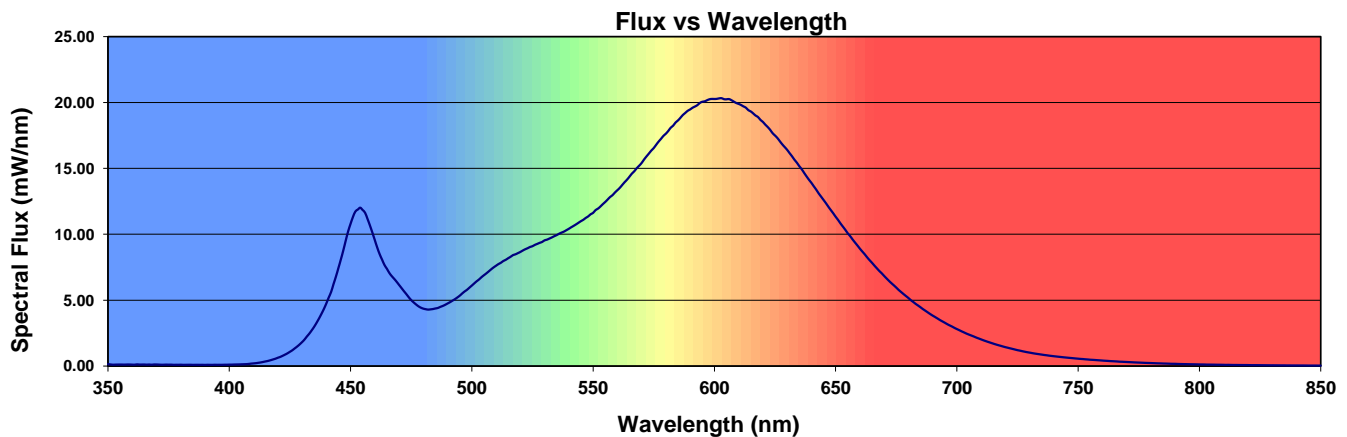



Distribution - Goniophotometer


Distribution Test Conditions

| Temperature | Voltage | Current | Power | Power Factor | Frequency | Current THD |
|-------------|-----------|----------|---------|--------------|-----------|-------------|
| 24.7 °C | 120.0 VAC | 0.1009 A | 11.91 W | 0.984 | 60 Hz | 17.4 % |

Summary of Results

| | | |
|--|----------------------------|--------------|
| Spacing Criteria | Total Lumen Output: | 975.6 Lumens |
| 0-180: 1.25 | Luminaire Efficacy: | 81.9 lm/w |
| 90-270: 1.25 | Maximum Candela: | 353 Candela |
| Corrected UGR (Room Dimension: X=4H, Y=8H, Reflectances: 70/50/20%, S/H: 1) | Endwise: | 27.3 |
| Crosswise: 27.3 | | |

Polar Plot

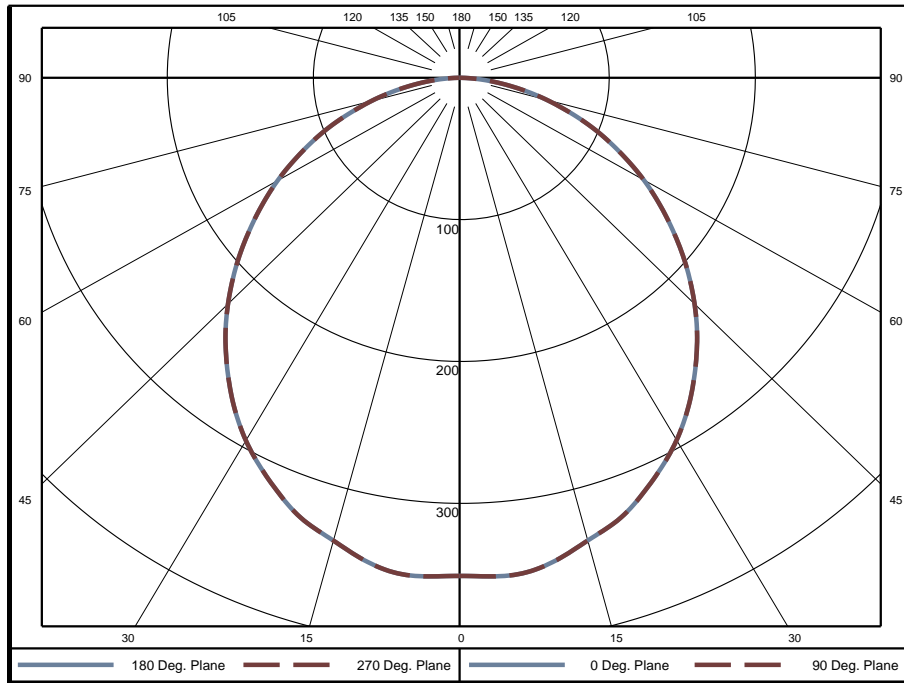

Zonal Lumen Summary

| Zone | Lumens | % of Luminaire | Zone | Lumens | % of Luminaire | Zone | Lumens | % of Luminaire |
|-------|--------|----------------|---------|--------|----------------|---------|--------|----------------|
| 0-5 | 8.42 | 0.9% | 60-65 | 63.89 | 6.5% | 120-125 | 0 | 0.0% |
| 5-10 | 25.11 | 2.6% | 65-70 | 52.66 | 5.4% | 125-130 | 0 | 0.0% |
| 10-15 | 40.67 | 4.2% | 70-75 | 39.85 | 4.1% | 130-135 | 0 | 0.0% |
| 15-20 | 54.86 | 5.6% | 75-80 | 26.86 | 2.8% | 135-140 | 0 | 0.0% |
| 20-25 | 67.15 | 6.9% | 80-85 | 14.34 | 1.5% | 140-145 | 0 | 0.0% |
| 25-30 | 76.94 | 7.9% | 85-90 | 3.97 | 0.4% | 145-150 | 0 | 0.0% |
| 30-35 | 83.98 | 8.6% | 90-95 | 0 | 0.0% | 150-155 | 0 | 0.0% |
| 35-40 | 87.74 | 9.0% | 95-100 | 0 | 0.0% | 155-160 | 0 | 0.0% |
| 40-45 | 88.53 | 9.1% | 100-105 | 0 | 0.0% | 160-165 | 0 | 0.0% |
| 45-50 | 86.17 | 8.8% | 105-110 | 0 | 0.0% | 165-170 | 0 | 0.0% |
| 50-55 | 80.95 | 8.3% | 110-115 | 0 | 0.0% | 170-175 | 0 | 0.0% |
| 55-60 | 73.49 | 7.5% | 115-120 | 0 | 0.0% | 175-180 | 0 | 0.0% |

| Zone | Lumens | % of Luminaire |
|--------|--------|----------------|
| 0-40 | 445 | 45.6% |
| 0-60 | 774 | 79.3% |
| 0-90 | 976 | 100.0% |
| 90-180 | 0 | 0.0% |



Candela Tabulation

Horizontal Angle (Degrees)

| | 0 | 22.5 | 45 | 67.5 | 90 | 112.5 | 135 | 157.5 | 180 | 202.5 | 225 | 247.5 | 270 | 292.5 | 315 | 337.5 |
|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 0 | 351.3 | 351.3 | 351.3 | 351.3 | 351.3 | 351.3 | 351.3 | 351.3 | 351.3 | 351.3 | 351.3 | 351.3 | 351.3 | 351.3 | 351.3 | 351.3 |
| 5 | 352.6 | 352.6 | 352.6 | 352.6 | 352.6 | 352.6 | 352.6 | 352.6 | 352.6 | 352.6 | 352.6 | 352.6 | 352.6 | 352.6 | 352.6 | 352.6 |
| 10 | 348.2 | 348.2 | 348.2 | 348.2 | 348.2 | 348.2 | 348.2 | 348.2 | 348.2 | 348.2 | 348.2 | 348.2 | 348.2 | 348.2 | 348.2 | 348.2 |
| 15 | 337.7 | 337.7 | 337.7 | 337.7 | 337.7 | 337.7 | 337.7 | 337.7 | 337.7 | 337.7 | 337.7 | 337.7 | 337.7 | 337.7 | 337.7 | 337.7 |
| 20 | 327.8 | 327.8 | 327.8 | 327.8 | 327.8 | 327.8 | 327.8 | 327.8 | 327.8 | 327.8 | 327.8 | 327.8 | 327.8 | 327.8 | 327.8 | 327.8 |
| 25 | 312.5 | 312.5 | 312.5 | 312.5 | 312.5 | 312.5 | 312.5 | 312.5 | 312.5 | 312.5 | 312.5 | 312.5 | 312.5 | 312.5 | 312.5 | 312.5 |
| 30 | 295.4 | 295.4 | 295.4 | 295.4 | 295.4 | 295.4 | 295.4 | 295.4 | 295.4 | 295.4 | 295.4 | 295.4 | 295.4 | 295.4 | 295.4 | 295.4 |
| 35 | 274.7 | 274.7 | 274.7 | 274.7 | 274.7 | 274.7 | 274.7 | 274.7 | 274.7 | 274.7 | 274.7 | 274.7 | 274.7 | 274.7 | 274.7 | 274.7 |
| 40 | 251.5 | 251.5 | 251.5 | 251.5 | 251.5 | 251.5 | 251.5 | 251.5 | 251.5 | 251.5 | 251.5 | 251.5 | 251.5 | 251.5 | 251.5 | 251.5 |
| 45 | 226.6 | 226.6 | 226.6 | 226.6 | 226.6 | 226.6 | 226.6 | 226.6 | 226.6 | 226.6 | 226.6 | 226.6 | 226.6 | 226.6 | 226.6 | 226.6 |
| 50 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 | 200.0 |
| 55 | 172.6 | 172.6 | 172.6 | 172.6 | 172.6 | 172.6 | 172.6 | 172.6 | 172.6 | 172.6 | 172.6 | 172.6 | 172.6 | 172.6 | 172.6 | 172.6 |
| 60 | 145.6 | 145.6 | 145.6 | 145.6 | 145.6 | 145.6 | 145.6 | 145.6 | 145.6 | 145.6 | 145.6 | 145.6 | 145.6 | 145.6 | 145.6 | 145.6 |
| 65 | 117.6 | 117.6 | 117.6 | 117.6 | 117.6 | 117.6 | 117.6 | 117.6 | 117.6 | 117.6 | 117.6 | 117.6 | 117.6 | 117.6 | 117.6 | 117.6 |
| 70 | 90.2 | 90.2 | 90.2 | 90.2 | 90.2 | 90.2 | 90.2 | 90.2 | 90.2 | 90.2 | 90.2 | 90.2 | 90.2 | 90.2 | 90.2 | 90.2 |
| 75 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 | 63.0 |
| 80 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 | 37.7 |
| 85 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 | 15.9 |
| 90 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 | 0.9 |
| 95 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 100 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 105 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 110 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 115 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 120 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 125 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 130 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 135 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 140 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 145 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 150 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 155 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 160 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 165 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 170 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 175 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

Average Luminance (cd/m²)

Horizontal Angle (Degrees)

| | 0 | 45 | 90 |
|----|-------|-------|-------|
| 0 | 27730 | 27730 | 27730 |
| 45 | 25300 | 25300 | 25300 |
| 55 | 23760 | 23760 | 23760 |
| 65 | 21970 | 21970 | 21970 |
| 75 | 19220 | 19220 | 19220 |
| 85 | 14370 | 14370 | 14370 |




Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 20%

| Ceiling Cavity Reflectance | 80 | | | | 70 | | | | 50 | | | 30 | | | 10 | | | 0 |
|----------------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Wall Reflectance | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| Room Cavity Ratio (RCR) | ** Values are expressed as percent of total lumen output delivered to the task surface ** | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 109 | 104 | 100 | 96 | 106 | 102 | 98 | 94 | 97 | 94 | 91 | 94 | 91 | 89 | 90 | 88 | 86 | 84 |
| 2 | 99 | 91 | 84 | 78 | 96 | 89 | 83 | 77 | 85 | 80 | 75 | 82 | 78 | 74 | 79 | 75 | 72 | 70 |
| 3 | 90 | 80 | 72 | 65 | 88 | 78 | 71 | 64 | 75 | 69 | 63 | 72 | 67 | 62 | 70 | 65 | 61 | 59 |
| 4 | 83 | 71 | 62 | 55 | 80 | 69 | 61 | 55 | 67 | 60 | 54 | 64 | 58 | 53 | 62 | 57 | 53 | 50 |
| 5 | 76 | 63 | 54 | 48 | 74 | 62 | 54 | 47 | 60 | 52 | 47 | 58 | 51 | 46 | 56 | 50 | 46 | 44 |
| 6 | 70 | 57 | 48 | 42 | 68 | 56 | 48 | 41 | 54 | 47 | 41 | 52 | 46 | 41 | 51 | 45 | 40 | 38 |
| 7 | 65 | 52 | 43 | 37 | 63 | 51 | 42 | 37 | 49 | 42 | 36 | 48 | 41 | 36 | 46 | 40 | 36 | 34 |
| 8 | 61 | 47 | 39 | 33 | 59 | 46 | 38 | 33 | 45 | 38 | 32 | 44 | 37 | 32 | 43 | 37 | 32 | 30 |
| 9 | 57 | 43 | 35 | 30 | 55 | 43 | 35 | 29 | 42 | 34 | 29 | 40 | 34 | 29 | 39 | 33 | 29 | 27 |
| 10 | 53 | 40 | 32 | 27 | 52 | 39 | 32 | 27 | 38 | 31 | 27 | 37 | 31 | 26 | 37 | 31 | 26 | 25 |


| Beam and Field Information | |
|----------------------------|---------------|
| CIE Type: | Direct |
| Center Beam Intensity: | 351.3 Candela |
| Central Cone Intensity: | 352 Candela |
| Beam Flux: | 691.9 Lumens |
| Beam Angle (0-180): | 108.9 Degrees |
| Beam Angle (90-270): | 108.9 Degrees |
| Field Angle (0-180): | 161.1 Degrees |
| Field Angle (90-270): | 161.1 Degrees |

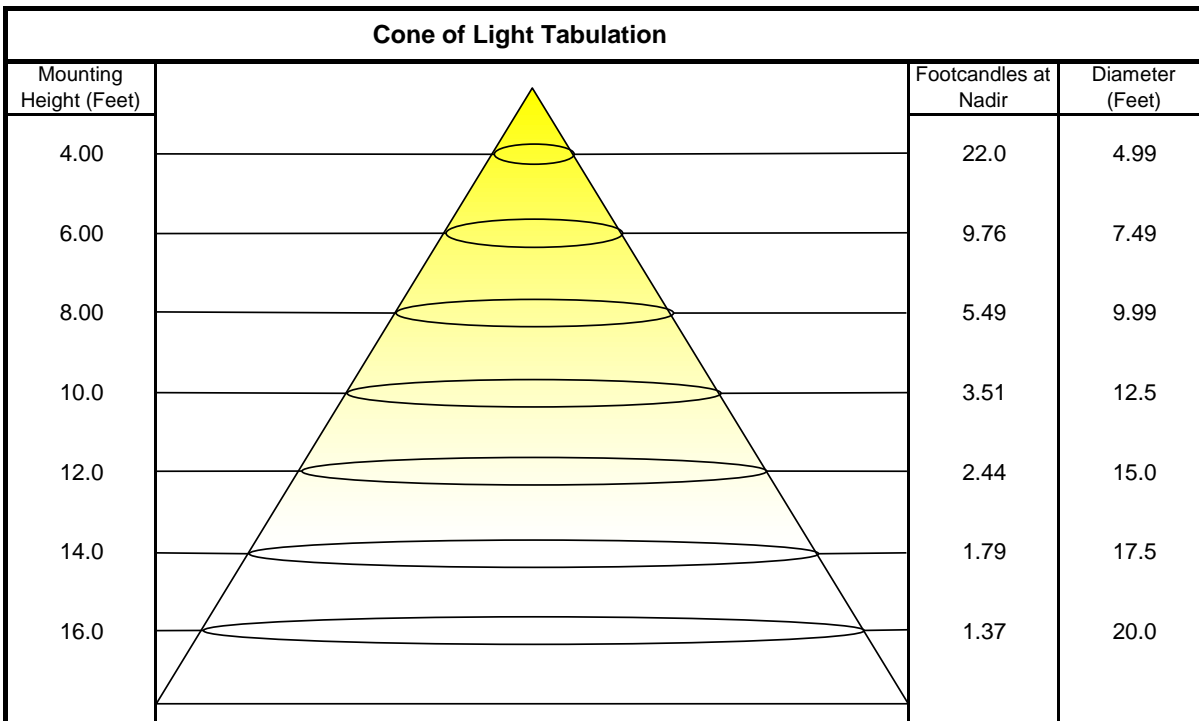




ISOFootcandle Plot

Mounting Height - 8 Feet

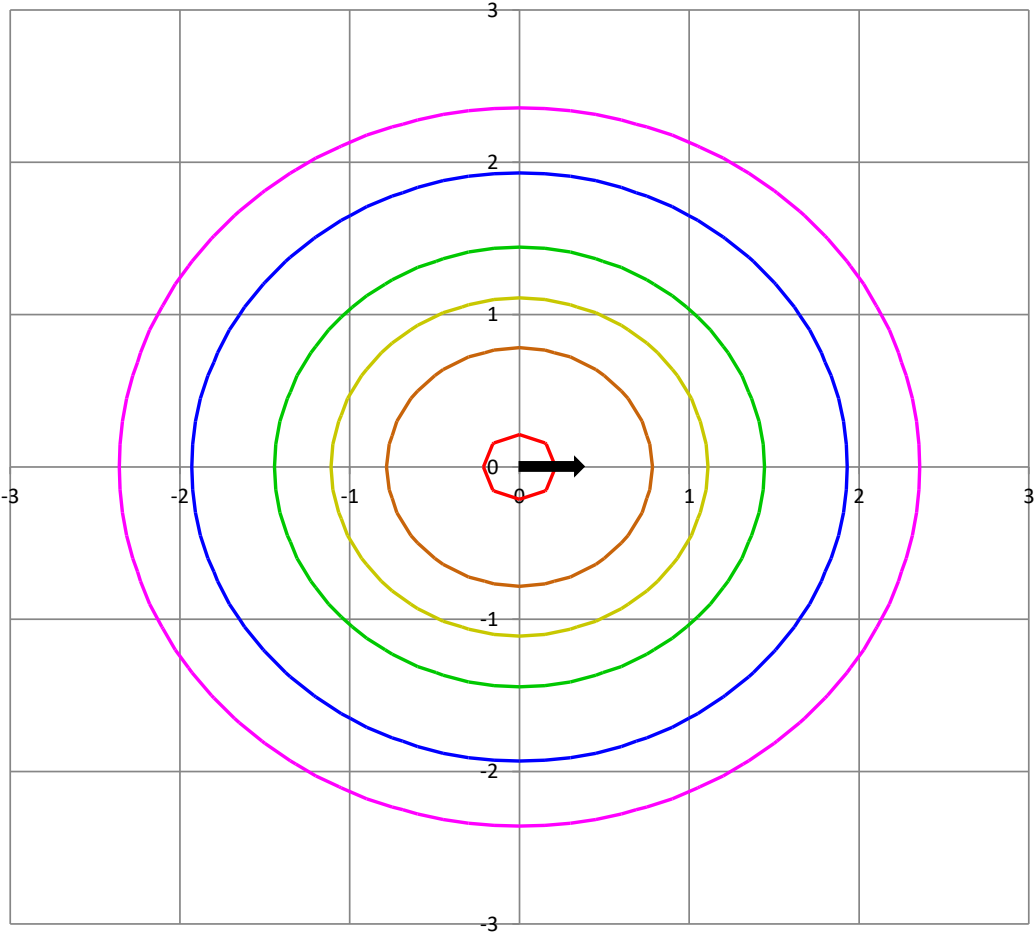

Grid Lines in Units of Mounting Height





In-Situ Test

In-Situ Test Conditions

| Temperature | Voltage | Current | Power | Power Factor | Frequency | Current THD |
|-------------|-----------|---------|-------|--------------|-----------|-------------|
| 23.6 °C | 120.1 VAC | N/A | N/A | N/A | 60 Hz | N/A |

Summary of Results


LED Temperature: 61.8 °C
Driver Temperature: 61.7 °C
Measured LED Current: 0.08500 A

Temperatures are offset to an ambient temperature of 25°C as described in UL1598-2008


LED Temperature Location



Thermocouple Reference

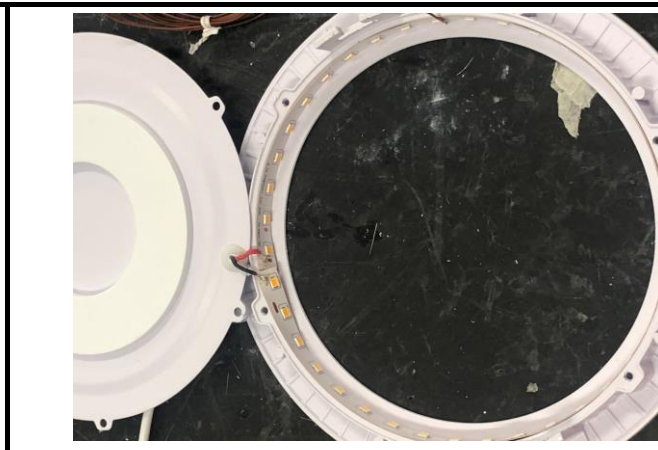

Driver Temperature Location

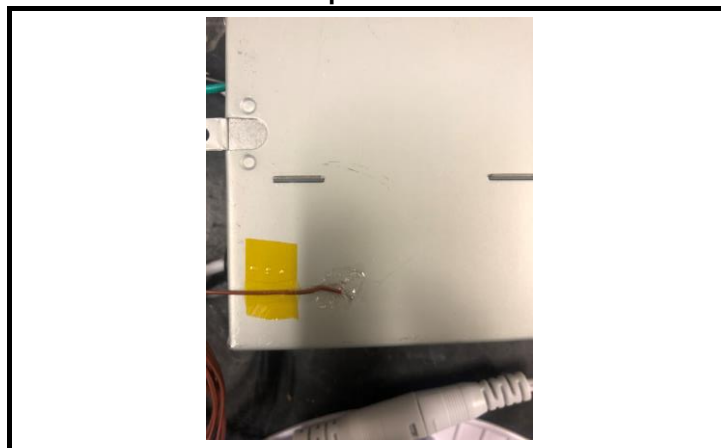



Color Spatial Uniformity

Color Spatial Uniformity Test Conditions

| Temperature | Voltage | Current | Power | Power Factor | Frequency | Current THD |
|-------------|-----------|----------|---------|--------------|-----------|-------------|
| 24.7 °C | 120.0 VAC | 0.1009 A | 11.91 W | 0.984 | 60 Hz | 17.4 % |

Spatially Averaged Color Coordinates

u'_a : 0.2521

v'_a : 0.5156

Maximum $\Delta u'v'$

0.0004

$\Delta u'v'$ Table

| Vertical Angle | H = 0° | H = 90° |
|----------------|--------|---------|
| 0 | 0.0004 | 0.0003 |
| 1 | 0.0002 | 0.0003 |
| 2 | 0.0002 | 0.0002 |
| 3 | 0.0002 | 0.0002 |
| 4 | 0.0002 | 0.0003 |
| 5 | 0.0002 | 0.0003 |
| 6 | 0.0002 | 0.0002 |
| 7 | 0.0002 | 0.0002 |
| 8 | 0.0001 | 0.0001 |
| 9 | 0.0002 | 0.0002 |
| 10 | 0.0003 | 0.0003 |
| 11 | 0.0002 | 0.0002 |
| 12 | 0.0001 | 0.0001 |
| 13 | 0.0000 | 0.0001 |
| 14 | 0.0000 | 0.0000 |
| 15 | 0.0001 | 0.0000 |
| 16 | 0.0002 | 0.0001 |
| 17 | 0.0002 | 0.0002 |
| 18 | 0.0002 | 0.0002 |
| 19 | 0.0002 | 0.0002 |
| 20 | 0.0002 | 0.0002 |
| 21 | 0.0001 | 0.0001 |
| 22 | 0.0001 | 0.0001 |
| 23 | 0.0001 | 0.0001 |
| 24 | 0.0002 | 0.0001 |
| 25 | 0.0001 | 0.0001 |
| 26 | 0.0000 | 0.0000 |

| Vertical Angle | H = 0° | H = 90° |
|----------------|--------|---------|
| 27 | 0.0001 | 0.0001 |
| 28 | 0.0002 | 0.0002 |
| 29 | 0.0002 | 0.0002 |
| 30 | 0.0001 | 0.0000 |
| 31 | 0.0001 | 0.0000 |
| 32 | 0.0000 | 0.0000 |
| 33 | 0.0000 | 0.0001 |
| 34 | 0.0001 | 0.0001 |
| 35 | 0.0002 | 0.0002 |
| 36 | 0.0002 | 0.0002 |
| 37 | 0.0001 | 0.0001 |
| 38 | 0.0000 | 0.0001 |
| 39 | 0.0000 | 0.0001 |
| 40 | 0.0001 | 0.0001 |
| 41 | 0.0002 | 0.0002 |
| 42 | 0.0001 | 0.0001 |
| 43 | 0.0002 | 0.0002 |
| 44 | 0.0001 | 0.0001 |
| 45 | 0.0001 | 0.0001 |
| 46 | 0.0001 | 0.0001 |
| 47 | 0.0000 | 0.0001 |
| 48 | 0.0000 | 0.0001 |
| 49 | 0.0001 | 0.0001 |
| 50 | 0.0001 | 0.0002 |
| 51 | 0.0001 | 0.0001 |
| 52 | 0.0002 | 0.0001 |
| 53 | 0.0002 | 0.0002 |
| 54 | 0.0001 | 0.0001 |